






3-Way ball valve type 543 PVC-U Vertical/L-port With threaded sockets NPT

Model:

- Vertical inlet solvent cement spigot metric
- Easy installation and removal using union on third outlet
- Ball seals PTFE
- Electric actuator available separately
- Angle of operation 360° without turn limiter
- Delivery status B-C opened, see flow scheme

Mode of action:

- For interconnection of two inputs

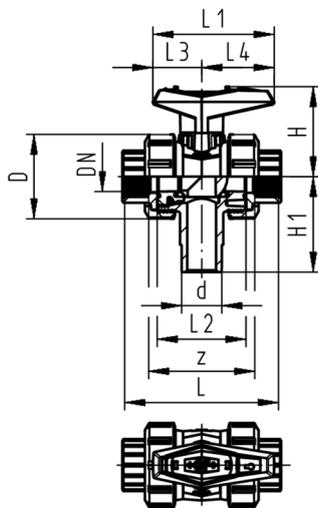

NPT [inch]	DN [mm]	PN [bar]	kv-val- ue ($\Delta p=1$ bar) [l/min]	EPDM Code	SP	Weight [kg]	FPM Code	SP	Weight [kg]
3/8	10	10	49	161 543 681	1	0.162	161 543 691	1	0.162
1/2	15	10	77	161 543 682	1	0.166	161 543 692	1	0.166
3/4	20	10	146	161 543 683	1	0.255	161 543 693	1	0.255
1	25	10	260	161 543 684	1	0.372	161 543 694	1	0.372
1 1/4	32	10	437	161 543 685	1	0.622	161 543 695	1	0.622
1 1/2	40	10	667	161 543 686	1	0.886	161 543 696	1	0.886
2	50	10	1293	161 543 687	1	1.617	161 543 697	1	1.617

NPT [inch]	D [mm]	H [mm]	H1 [mm]	L [mm]	L1 [mm]	L2 [mm]	L3 [mm]	L4 [mm]	z [mm]
3/8	50	57	62	98	77	56	32	45	70
1/2	50	57	62	98	77	56	32	45	64
3/4	58	67	72	112	97	66	39	58	76
1	68	73	77	127	97	71	39	58	83
1 1/4	84	90	87	146	128	85	54	74	99
1 1/2	97	97	97	157	128	89	54	74	111
2	124	116	112	183	152	101	66	87	135

PF 2 31 001 903